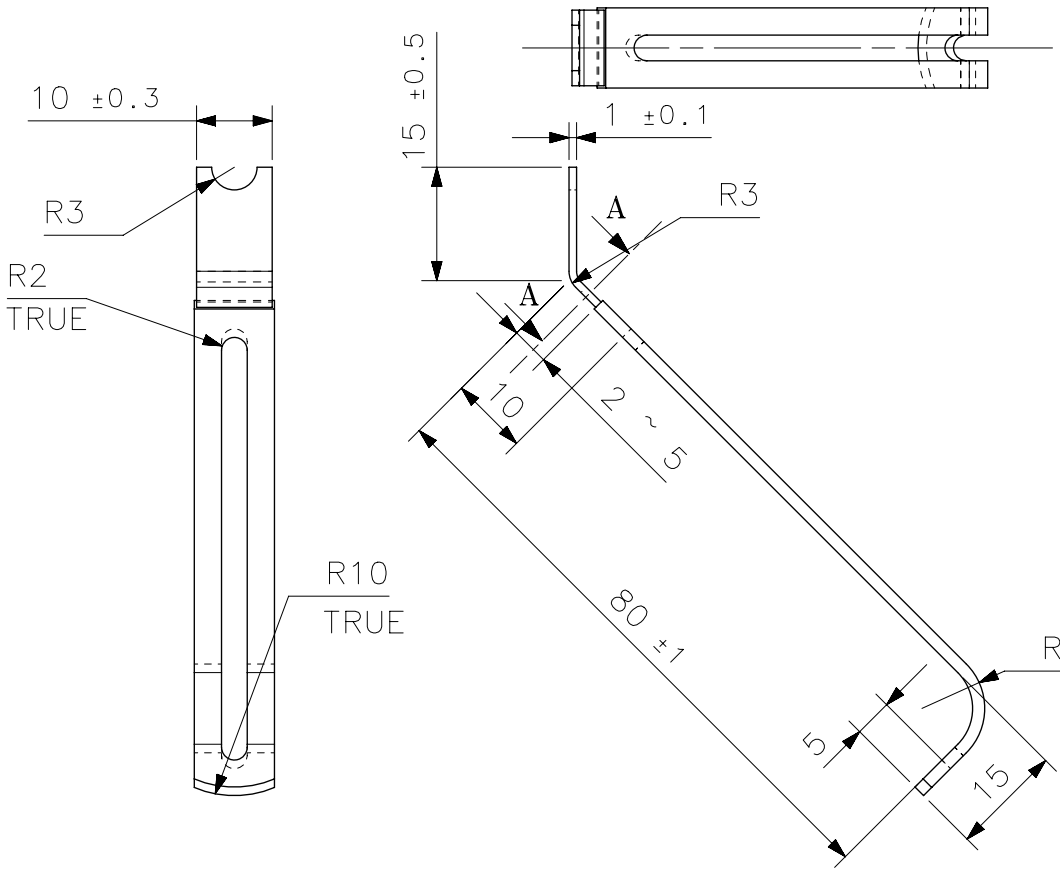

UNSPECIFIED TOLERANCE

1. FORMING TO FORMING	+0.5
2. HOLE SIZES	+0.2/0
3. GENERAL TOLERANCES	
UPTO 300mm	+0.8
ABOVE 300mm	+1.0

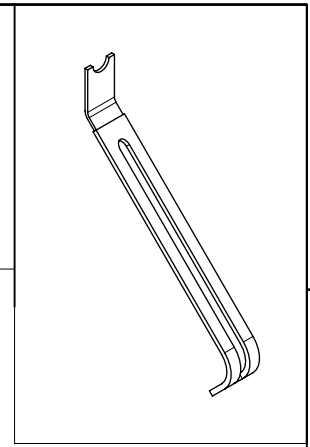

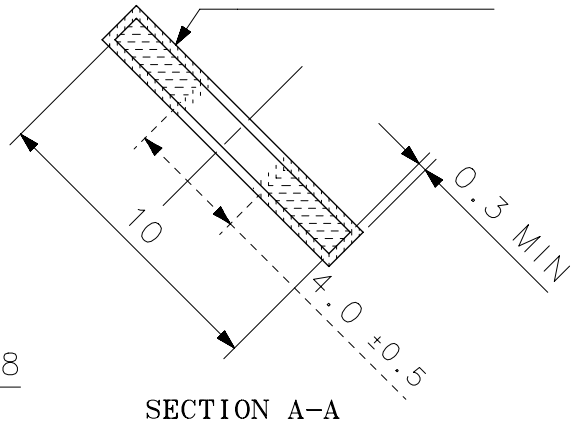

SECTION A–A

SCALE 4:1

NOTE:

PVC COVERING SHOULD SUSTAIN 200° C OVEN TEMPERATURE

<SC> :SIGNIFICANT CHARACTERISTICS ▽ :CRITICAL CHARACTERISTICS

BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.

UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989

DIMENSIONS

			OVER	0.5	3	6	30	120	400	1000	2000
LINEAR IN mm.			UPTO	3	6	30	120	400	1000	2000	4000
f	FINE	(X.XXX)		± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-
m	MEDIUM	(X.XX)		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2
c	COARSE	(X.X)		± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4
v	VERY COARSE	(X)		-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8

			LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.				
ANGULAR IN deg.		OVER	-	10	50	120	400
		UPTO	10	50	120	400	-
f	FINE	(X.XXX)	± 1°	± 0° 30'	± 0° 20'	± 0° 10'	± 0° 5'
m	MEDIUM	(X.XX)					
c	COARSE	(X.X)	± 1° 30'	± 1°	± 0° 30'	± 0° 15'	± 0° 10'
v	VERY COARSE	(X)	± 3°	± 2°	± 1°	± 0° 30'	± 0° 20'

PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.

COMPUTER GENERATED DRAWING | DO NOT CHANGE MANUALLY

IF IN DOUBT, ASK | DO NOT SCALE | DRG SIZE : A4

MAHINDRA & MAHINDRA LIMITED
TRACTOR DIVISION
KANDIVLI(EAST), MUMBAI 400 101, INDIA.

E.R. / PROC.REQ.NO : 500000005562

PART NO. : 000060811M01

PART NAME : CLIP

MATERIAL : MS 1mm THK

HEAT TREATMENT : NONE

	NAME	SIGN	DATE
CAD ENGG.			
DESIGNER	PKS		23/11/07
CHECKER	RNM		23/11/07
APPR.BY	DHM		23/11/07

FIRST USED TRCR. MODEL ----

SCALE 1 : 1

SHEET 1 OF 1

UNIT QTY. : AS REQD.

WEIGHT : 0.006 kg.

ALL DIMENSIONS ARE IN mm. | CHECK DRG WITH LATEST CHANGE No

E.R.NO.	LET	LOC	REVISIONS	DSNR	CKR.	APPR.	DATE
600000005606	AB		REDRAWN WITH 3D REF	SM	NVC	RAW	22/01/14